


Guangzhou Jiguang Lighting Co.,Ltd

T8 LED Tube Light



Dimension



Length	A (mm)	B (mm)	C (mm)	D (mm)
2FT	588	603	26	32
4FT	1198	1213	26	32
5FT	1498	1514	26	32
8FT	2372	2387	26	32

Features

- ★ Instant on, no flicker or buzz .
- ★ High power factor over 0.95 .
- ★ Aluminum + PC materials , good heat dissipating .
- ★ Replace t8 fluorescent tube directly , fit well into existing t8 fixture .

Benefits

- ★ Mercury-free , no hazardous waste disposal .
- ★ Suitable for operation at low temperatures .
- ★ Energy saving of up to 65% compared to T8 fluorescent lamp .

Application

- ★ Corridors, stairways , parking garages .
- ★ Industry, warehouses
- ★ Building , office , home , school .
- ★ Supermarkets and department stores , shops, etc.
- ★ Outdoor application only with suitable luminaries or housing .

Specification

Model No.	Length	Power	LED Chip	Input Voltage	Power Factor	Lumens Output	Color Temperature	CRI	Life Time	Beam Angle
CP-T806-9W	600mm / 2ft	9W	SMD2835	100-240V AC	0.93	990 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-16W	1200mm / 4ft	16W	SMD2835	100-240V AC	0.97	1760 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-18W	1200mm / 4ft	18W	SMD2835	100-240V AC	0.97	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-20W	1200mm / 4ft	20W	SMD2835	100-240V AC	0.97	2100 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-22W	1200mm / 4ft	22W	SMD2835	100-240V AC	0.97	2300 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T815-23W	1500mm / 5ft	23W	SMD2835	100-240V AC	0.97	2450 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T815-25W	1500mm / 5ft	25W	SMD2835	100-240V AC	0.97	2650 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T824-36W	2400mm / 8ft	36W	SMD2835	100-240V AC	0.97	3950 lm	2700K-7000K	Ra>80	50,000 Hrs	160°

OEM Service

- ★ Can customize different length
- ★ Can customize higher CRI
- ★ Can customize higher brightness

Packing

Length	Carton Size	PCS/CTN	Volume	Gross Weight
2FT	127*22*22 cm	50	0.0615 CBM	7.0 kg
4FT	127*22*22 cm	25	0.0615 CBM	6.5 kg
5FT	157*22*22 cm	25	0.0759 CBM	7.5 kg
8FT	245*22*15 cm	15	0.0809 CBM	9.0 kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd


Integrated LED Tube Light



Features

- ★ Instant on, no flicker or buzz .
- ★ High power factor over 0.95 .
- ★ Aluminum + PC materials , good heat dissipating .
- ★ Install directly , no need tube fixture or holder.

U-Bent T8 LED Tube Light

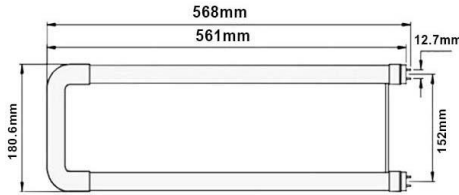

Benefits

- ★ Mercury-free , no hazardous waste disposal .
- ★ Suitable for operation at low temperatures .
- ★ Energy saving of up to 65% compared to T8 fluorescent lamp .

Application

- ★ Corridors, stairways , parking garages .
- ★ Industry, warehouses
- ★ Building , office , home , school .
- ★ Supermarkets and department stores , shops, etc.
- ★ Outdoor application only with suitable luminaries or housing .

Specification

Model No.	Length	Power	LED Chip	Input Voltage	Power Factor	Lumens Output	Color Temperature	CRI	Life Time	Beam Angle
T8 Integrated LED Tube										
CP-T806-9WI	600mm / 2ft	9W	SMD2835	100-240V AC	0.93	990 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-18WI	1200mm / 4ft	18W	SMD2835	100-240V AC	0.97	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T815-23WI	1500mm / 5ft	23W	SMD2835	100-240V AC	0.97	2450 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
T5 Integrated LED Tube										
CP-T506-9WI	600mm / 2ft	9W	SMD2835	100-240V AC	0.93	990 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T512-18WI	1200mm / 4ft	18W	SMD2835	100-240V AC	0.97	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T515-23WI	1500mm / 5ft	23W	SMD2835	100-240V AC	0.97	2450 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
U-Bent T8 LED Tube										
CP-T806-18WU	600mm / 2ft	18W	SMD2835	100-277V AC	0.95	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°

OEM Service

- ★ Can customize different length and wattage
- ★ Can customize higher brightness
- ★ Can customize higher CRI

Packing

Model No.	CP-T806-9WI	CP-T812-18WI	CP-T815-23WI	CP-T506-9WI	CP-T512-18WI	CP-T515-23WI	CP-T806-18WU
Carton Size	127*22*25cm	127*22*25cm	157*22*25cm	124*35*24cm	124*35*24cm	154*35*24cm	66*28*25cm
PCS/CTN	50	25	25	100	50	50	10
Volume	0.0699 CBM	0.0699 CBM	0.0864 CBM	0.1042 CBM	0.1042 CBM	0.1294 CBM	0.0462 CBM
Gross Weight	7.5kg	7kg	8.5kg	13kg	12kg	15kg	5kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax: +86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd

PIR Sensor T8 LED Tube Light



Features

- ★ Instant on, no flicker or buzz .
- ★ High power factor over 0.95 .
- ★ Aluminum + PC materials , good heat dissipating .
- ★ Work with sensor , intelligent and energy saving .


Microwave Sensor T8 LED Tube Light



Benefits

- ★ Mercury-free , no hazardous waste disposal .
- ★ Suitable for operation at low temperatures .
- ★ Sensor control , intelligent and energy saving .

Dimension



Length	A (mm)	B (mm)	C (mm)	D (mm)
2FT	588	603	26	32
4FT	1198	1213	26	32
5FT	1498	1514	26	32

Application

- ★ Corridors, stairways , parking garages .
- ★ Industry, warehouses
- ★ Building , office , home , school .
- ★ Supermarkets and department stores , shops, etc.
- ★ Outdoor application only with suitable luminaries or housing .

Specification

Model No.	Length	Power	LED Chip	Standby Power	Detective Distance	Time Delay	Lumens Output	Color Temperature	Input Voltage	Life Time	Beam Angle
PIR Sensor T8 LED Tube											
CP-T806-9WPIR	600mm / 2ft	9W	SMD2835	3W / 0W	5-6m	25s-60s	990 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°
CP-T812-18WPIR	1200mm / 4ft	18W	SMD2835	3W / 0W	5-6m	25s-60s	1980 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°
CP-T815-23WPIR	1500mm / 5ft	23W	SMD2835	3W / 0W	5-6m	25s-60s	2450 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°
Microwave Sensor T8 LED Tube											
CP-T506-9WRD	600mm / 2ft	9W	SMD2835	3W / 0W	5-12m	25s-60s	990 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°
CP-T512-18WRD	1200mm / 4ft	18W	SMD2835	3W / 0W	5-12m	25s-60s	1980 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°
CP-T515-23WRD	1500mm / 5ft	23W	SMD2835	3W / 0W	5-12m	25s-60s	2450 lm	2700K-7000K	100-240V AC	50,000 Hrs	160°

Packing

Model No.	CP-T806-9WPIR	CP-T812-18WPIR	CP-T815-23WPIR	CP-T506-9WRD	CP-T512-18WRD	CP-T515-23WRD
Carton Size	127*22*25cm	127*22*25cm	157*22*25cm	127*22*22cm	127*22*22cm	157*22*22cm
PCS/CTN	50	25	25	50	25	25
Volume	0.0699 CBM	0.0699 CBM	0.0864 CBM	0.0615 CBM	0.0615 CBM	0.0759 CBM
Gross Weight	7.5kg	7kg	8kg	7.5kg	7kg	8kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd

A60 LED Bulb



Features

- ★ Instant on, no flicker or buzz .
- ★ Aluminum + anti-fire plastic materials , good heat dissipating and safe.
- ★ Replace incandescent lamp and CFL directly .

Benefits

- ★ Uniform light distribution .
- ★ No warm up time - instant 100% light output .
- ★ Will not fade colors , avoids inventory spoilage .
- ★ Long life - reduced maintenance cost .
- ★ Low energy use and waste , environment friendly .

Application

- ★ Table and floor lamps, pendants , and wall sconces .
- ★ Ambient lighting in hotels, restaurants , retail and residential spaces .

R63 / R80 LED Bulb



Specification

Model No.	Power	Size	Base	Input Voltage	Frequency	Lumens Output	Color Temperature	CRI	Life Time	Beam Angle
CP-BL01-5W	5W	Φ60*109mm	E27/B22	100-240V AC	50Hz/60Hz	500 lm	WW / NW / CW	>80	35,000 Hrs	270°
CP-BL01-7W	7W	Φ60*109mm	E27/B22	100-240V AC	50Hz/60Hz	700 lm	WW / NW / CW	>80	35,000 Hrs	270°
CP-BL01-9W	9W	Φ60*109mm	E27/B22	100-240V AC	50Hz/60Hz	900 lm	WW / NW / CW	>80	35,000 Hrs	270°
CP-BL01-12W	12W	Φ60*117mm	E27/B22	100-240V AC	50Hz/60Hz	1300 lm	WW / NW / CW	>80	35,000 Hrs	270°
CP-BL01-15W	15W	Φ70*133mm	E27/B22	100-240V AC	50Hz/60Hz	1450 lm	WW / NW / CW	>80	35,000 Hrs	270°
CP-BR63-7W	7W	Φ63*104mm	E27/B22	100-240V AC	50Hz/60Hz	700 lm	WW / NW / CW	>80	35,000 Hrs	180°
CP-BR63-9W	9W	Φ63*104mm	E27/B22	100-240V AC	50Hz/60Hz	900 lm	WW / NW / CW	>80	35,000 Hrs	180°
CP-BR80-12W	12W	Φ80*117mm	E27/B22	100-240V AC	50Hz/60Hz	1300 lm	WW / NW / CW	>80	35,000 Hrs	180°
CP-BR80-15W	15W	Φ80*117mm	E27/B22	100-240V AC	50Hz/60Hz	1450 lm	WW / NW / CW	>80	35,000 Hrs	180°

* WW : 2700K-3500K NW: 4000K-4500K CW: 6000K-6500K

OEM Service

- ★ Can customize packing box and print logo on lamp body.
- ★ Can customize lower / higher brightness.

Packing

Model No.	CP-BL01-5W	CP-BL01-7W	CP-BL01-9W	CP-BL01-12W	CP-BL01-15W	CP-BR63-7W/9W	CP-BR80-12W/15W
Carton Size	33*33*47cm	33*33*47cm	33*33*47cm	33*33*52cm	37*37*55 cm	34*34*45 cm	43*43*52 cm
PCS/CTN	100	100	100	100	100	100	100
Volume	0.0512CBM	0.0512CBM	0.0566CBM	0.0566CBM	0.075 CBM	0.052 CBM	0.096 CBM
Gross Weight	6.8kg	7kg	7.5kg	8kg	9kg	7kg	9.5kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd

Ultra Slim LED Panel Light



Features

- ★ Instant on, no flicker or buzz.
- ★ Aluminum materials , good heat dissipating.
- ★ Ultra slim design looks elegant and modern.
- ★ Top grade PMMA light guide plate gives uniform light.

Application

- ★ hotel, home, shopping mall, school, hospital, etc.

Specification

Model No.	Power	Lumens	Dimension	Cutout Size	Input Voltage	Color Temperature	LED Chip	Recessed Mounting	Unit Price	Ceiling Mounting	Life Time
CP-PL01-3WR	3W	225lm	Φ90*20mm	Φ70mm	100-240V AC	WW/W	SMD2835*15PCS	✓	\$ 0.95		35,000 Hrs
CP-PL01-6WR	6W	450lm	Φ120*20mm	Φ100mm	100-240V AC	WW/W	SMD2835*30PCS	✓	\$ 1.35	✓	35,000 Hrs
CP-PL01-9WR	9W	675lm	Φ145*20mm	Φ125mm	100-240V AC	WW/W	SMD2835*45PCS	✓	\$ 1.95		35,000 Hrs
CP-PL01-12WR	12W	900lm	Φ170*20mm	Φ150mm	100-240V AC	WW/W	SMD2835*60PCS	✓	\$ 2.15	✓	35,000 Hrs
CP-PL01-15WR	15W	1125lm	Φ190*20mm	Φ170mm	100-240V AC	WW/W	SMD2835*75PCS	✓	\$ 2.70		35,000 Hrs
CP-PL01-18WR	18W	1350lm	Φ225*20mm	Φ205mm	100-240V AC	WW/W	SMD2835*90PCS	✓	\$ 2.75	✓	35,000 Hrs
CP-PL01-24WR	24W	1800lm	Φ300*20mm	Φ280mm	100-240V AC	WW/W	SMD2835*120PCS	✓	\$ 4.70	✓	35,000 Hrs
CP-PL01-3WS	3W	225lm	90*90*20mm	70*70mm	100-240V AC	WW/W	SMD2835*15PCS	✓	\$ 1.00		35,000 Hrs
CP-PL01-6WS	6W	450lm	120*120*20mm	100*100 mm	100-240V AC	WW/W	SMD2835*30PCS	✓	\$ 1.50	✓	35,000 Hrs
CP-PL01-9WS	9W	675lm	145*145*20mm	125*125mm	100-240V AC	WW/W	SMD2835*45PCS	✓	\$ 2.00		35,000 Hrs
CP-PL01-12WS	12W	900lm	170*170*20mm	150*150mm	100-240V AC	WW/W	SMD2835*60PCS	✓	\$ 2.30	✓	35,000 Hrs
CP-PL01-15WS	15W	1125lm	190*190*20mm	170*170mm	100-240V AC	WW/W	SMD2835*75PCS	✓	\$ 2.85		35,000 Hrs
CP-PL01-18WS	18W	1350lm	225*225*20mm	205*205mm	100-240V AC	WW/W	SMD2835*90PCS	✓	\$ 2.95	✓	35,000 Hrs
CP-PL01-24WS	24W	1800lm	300*300*20mm	280*280mm	100-240V AC	WW/W	SMD2835*120PCS	✓	\$ 4.80	✓	35,000 Hrs

OEM Service

- ★ Can customize color temperature
- ★ Can customize packing box
- ★ Can customize higher brightness

Packing

Power (Round)	3W	6W	9W	12W	15W	18W	24W
Carton Size	51*32*29cm	49*34*27cm	39*33*35cm	47*33*39cm	50*42*26cm	50*48*30cm	65*38*38cm
PCS/CTN	100	60	40	40	30	30	20
Volume	0.0473CBM	0.0449CBM	0.0451CBM	0.0605CBM	0.0546CBM	0.0720CBM	0.0939CBM
Gross Weight	13.5kg	13.5kg	12kg	14kg	14kg	17kg	21kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd

Basic LED Flood Light



Features

- ★ Aluminum materials , good heat dissipating.
- ★ IP65 waterproof , idea for both outdoor and indoor use.
- ★ International plug with ground wire is optional.

Application

- ★ Widely used in garden, tree, bridge, advertisement signboard, building, etc.

Specification

Model No.	Power	Lumens	LED Chip	Input Voltage	CRI	Beam Angle	Color Temperature	IP Grade	Life Time
CP-FL01-10W	10W	900lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs
CP-FL01-20W	20W	1800lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs
CP-FL01-30W	30W	2700lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs
CP-FL01-50W	50W	4500lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs
CP-FL01-100W	100W	9000lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs
CP-FL01-150W	150W	13500lm	Epileds	100-240V AC	Ra>72	120°	2700K-7000K	IP65	50,000 Hrs

RGB LED Flood Light



Features

- ★ Aluminum materials , good heat dissipating.
- ★ IP65 waterproof , idea for both outdoor and indoor use.
- ★ Multi-color by remote controller, making colorful illumination.
- ★ International plug with ground wire is optional.

Application

- ★ Widely used in garden, tree, bridge, landmark, building, etc.

Specification

Model No.	Power	LED Chip	Color	Input Voltage	Beam Angle	IP Grade	Life Time
CP-FL01-10WRGB	10W	Epileds	RGB	100-240V AC	120°	IP65	50,000 Hrs
CP-FL01-20WRGB	20W	Epileds	RGB	100-240V AC	120°	IP65	50,000 Hrs
CP-FL01-30WRGB	30W	Epileds	RGB	100-240V AC	120°	IP65	50,000 Hrs
CP-FL01-50WRGB	50W	Epileds	RGB	100-240V AC	120°	IP65	50,000 Hrs

Packing

Power	10W	20W	30W	50W	100W	150W
Carton Size	47*26*30cm	55*20*66cm	67*26*42cm	72*31*50cm	63*33*41cm	46*40*38cm
PCS/CTN	30	20	10	12	4	2
Volume	0.0367CBM	0.0726CBM	0.0732CBM	0.1116CBM	0.0852CBM	0.0699CBM
Gross Weight	16kg	21.5kg	16kg	29kg	17.5kg	15kg

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729

Guangzhou Jiguang Lighting Co.,Ltd

UV LED Flood Light



Features

- ★ International plug with ground wire is optional.
- ★ IP65 waterproof , idea for both outdoor and indoor use.
- ★ Aluminum heatsink, perfect heat dissipating, long lifespan.
- ★ UV light makes some invisible thing visible, ideal for artwork, party, also ok for curing , glue consolidation.

Application

- ★ Widely used in art store, exhibition center, painting, industrial application, etc.

Specification

Model No.	Power	Wave Length	Color	Input Voltage	LED Chip	Beam Angle	IP Grade	Lamp Color	Life Time
CP-FL01-10WUV	10W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-20WUV	20W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-30WUV	30W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-50WUV	50W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-100WUV	100W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-150WUV	150W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs
CP-FL01-200WUV	200W	385-400nm (OEM available)	UV	AC 85-265V	Epistar	120°	IP65	Black / Grey	50,000 Hrs

Rechargeable LED Work Light



Features

- ★ Brightness can be dimmable from 100% to 50%.
- ★ SOS function: Red & Blue light flash.
- ★ Power Bank: charge mobile or other digital devices as power bank.
- ★ Emergency Light: when power outage, it still work.
- ★ Stable Stand: Anti-slip design for stable stand, bracket adjustable to 180°
- ★ Waterproof: IP55 waterproof design, ok for outdoor use.
- ★ Rechargeable LED Light: build-in battery technology allow quick and convenient USB charging.
- ★ Durable Materials: impact-resistant design with TPR and ABS material, ok for 1.5m high drop.

Application

- ★ Outdoor: Camping,Hiking,Fishing,Barbecue,Car Repairing, Exploring, etc.
- ★ Indoor: use as Portable Flood lights in Basement,Garage or Garden.

Specification

Model No.	Power	Charging Time	Working Hours	High Lumen	Low Lumen	Color Temperature	Input Voltage	Frequency	Beam Angle	Life Time
CP-WL01-10W	10W	3-4 hours	3-4 hours	1000lm	500lm	2700K-7000K	AC 200-240V	50Hz/60Hz	120°	50,000 Hrs

Add.:4th Floor, Building 2, #38, Longgang Road, Baiyun District, Guangzhou 510445, China
Tel: +86-(020) 23323729 Fax:+86-(020) 23323729